NAAMS 부품

NAAMS Products

Guide Blocks

■ 재질

#500CS(SM45C+Graphite)

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC 50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4

G01 & 02 Series

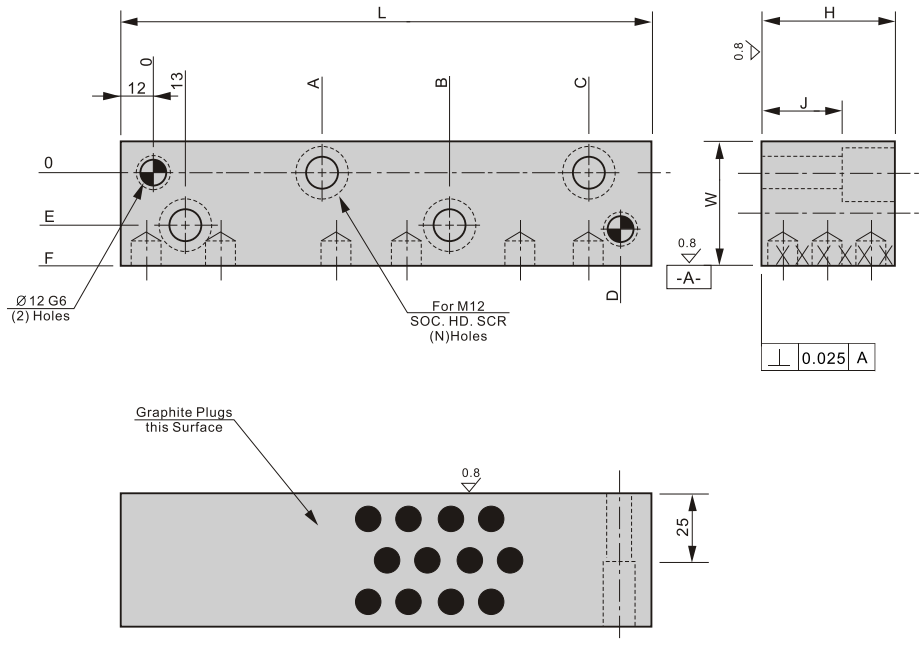

주문방법

LuBo NAAMS 코드

예) 45mm 폭 : LB G014007
60mm 폭 : LB G025007

주문생산

■ G01 Series (45mm 폭)

LuBo NAAMS 코드	HOLES (N)	L	A	B	C	D	E	F	H	J	W
LB G014007	2	75	-	-	38	51	18	33	40	15	45
LB G014010		100			63	76					
LB G014012	3	125		50.5	88	101					
LB G014015		150		63	113	126					
LB G014017		175		75.5	138	151					
LB G014020	4	200	63	113	163	176					
LB G014022		225	73	128	188	201					
LB G014025		250	83	153	213	226					
LB G014507	2	75	-	-	38	51			45	25	
LB G014510		100			63	76					
LB G014512	3	125		50.5	88	101					
LB G014515		150		63	113	126					
LB G014517		175		75.5	138	151					
LB G014520	4	200	63	113	163	176					
LB G014522		225	73	128	188	201					
LB G014525		250	83	153	213	226					
LB G015007	2	75	-	-	38	51			50	30	
LB G015010		100			63	76					
LB G015012	3	125		50.5	88	101					
LB G015015		150		63	113	126					
LB G015017		175		75.5	138	151					
LB G015020	4	200	63	113	163	176					
LB G015022		225	73	128	188	201					
LB G015025		250	83	153	213	226					
LB G016007	2	75	-	-	38	51			60		
LB G016010		100			63	76					
LB G016012	3	125		50.5	88	101					
LB G016015		150		63	113	126					
LB G016017		175		75.5	138	151					
LB G016020	4	200	63	113	163	176					
LB G016022		225	73	128	188	201					
LB G016025		250	83	153	213	226					
LB G017507	2	75	-	-	38	51			75		
LB G017510		100			63	76					
LB G017512	3	125		50.5	88	101					
LB G017515		150		63	113	126					
LB G017517		175		75.5	138	151					
LB G017520	4	200	63	113	163	176					
LB G017522		225	73	128	188	201					
LB G017525		250	83	153	213	226					

Guide Blocks

■ G02 Series (60mm 폭)

LuBo NAAMS 코드	HOLES (N)	L	A	B	C	D	E	F	H	J	W
LB G025007	2	75	-	-	38	51	33	48	50	30	60
LB G025010		100			63	76					
LB G025012	3	125		50.5	88	101					
LB G025015		150		63	113	126					
LB G025017		175		75.5	138	151					
LB G025020	4	200	63	113	163	176					
LB G025022		225	73	128	188	201					
LB G025025		250	83	153	213	226					
LB G026007	2	75	-	-	38	51			60		
LB G026010		100			63	76					
LB G026012	3	125		50.5	88	101					
LB G026015		150		63	113	126					
LB G026017		175		75.5	138	151					
LB G026020	4	200	63	113	163	176					
LB G026022		225	73	128	188	201					
LB G026025		250	83	153	213	226					
LB G028007	2	75	-	-	38	51			80		
LB G028010		100			63	76					
LB G028012	3	125		50.5	88	101					
LB G028015		150		63	113	126					
LB G028017		175		75.5	138	151					
LB G028020	4	200	63	113	163	176					
LB G028022		225	73	128	188	201					
LB G028025		250	83	153	213	226					
LB G020007	2	75	-	-	38	51			100		
LB G020010		100			63	76					
LB G020012	3	125		50.5	88	101					
LB G020015		150		63	113	126					
LB G020017		175		75.5	138	151					
LB G020020	4	200	63	113	163	176					
LB G020022		225	73	128	188	201					
LB G020025		250	83	153	213	226					

■ 재질

#500CS(SM45C+Graphite)

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC 50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4

G11 Series

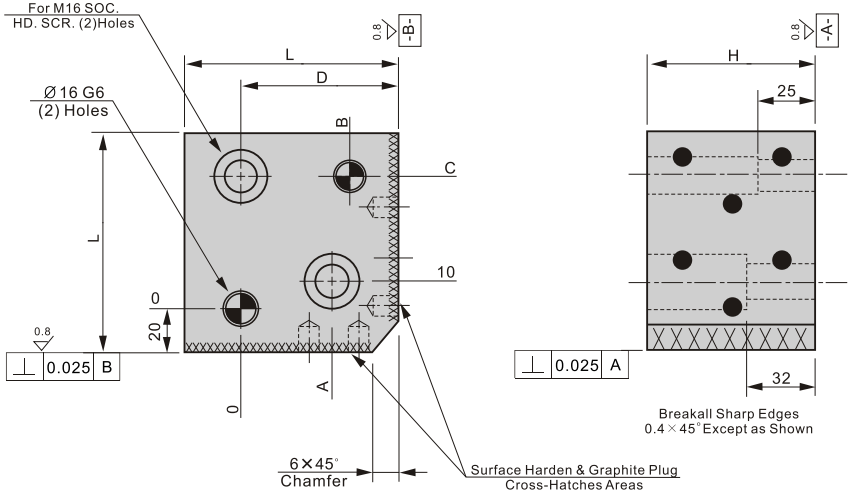

LuBo NAAMS 코드	H	A	B	C	D	L
LB G118007	75	25	35	40	55	80
LB G118010	100					
LB G118012	125					
LB G119507	75	40	50	55	70	95
LB G119510	100					
LB G119512	125					
LB G111207	75	65	75	80	95	120
LB G111210	100					
LB G111212	125					

주문방법 LuBo NAAMS 코드
예) LB G118007

주문생산

75mm 'U' 블럭

75mm Wide Female 'U' Blocks

■ 재질

SM45C

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC 50~)
- 볼트 홀 간격 공차 : ±0.12
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4

주문방법 — LuBo NAAMS 코드

예) LB G217515

주문생산

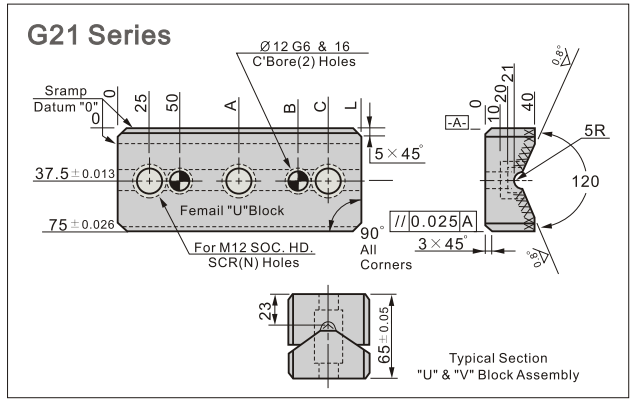

FEMALE "U" Blocks(STEEL)					
LuBo NAAMS 코드	L	A	B	C	N
LB G217515	150	-	100	125	2
LB G217520	200	-	150	175	
LB G217525	250	125	200	225	3
LB G217530	300	150	250	275	

75mm 'V' 블럭

75mm Wide Male 'V' Blocks

■ 재질

#500CS 또는 #500SP
(SM45C 또는 CAC304+Graphite)

■ 주의

- Steel인 경우는 X로 해칭한 면에 고주파 열처리하고 윤활제 매입
- 볼트 홀 간격 공차 : ±0.12
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4
- 코드에서 X는 SM45C+Graphite (#500CS)
- 코드에서 Y는 동합금+Graphite (CAC304)

주문방법 — LuBo NAAMS 코드

예) LB G227515

주문생산

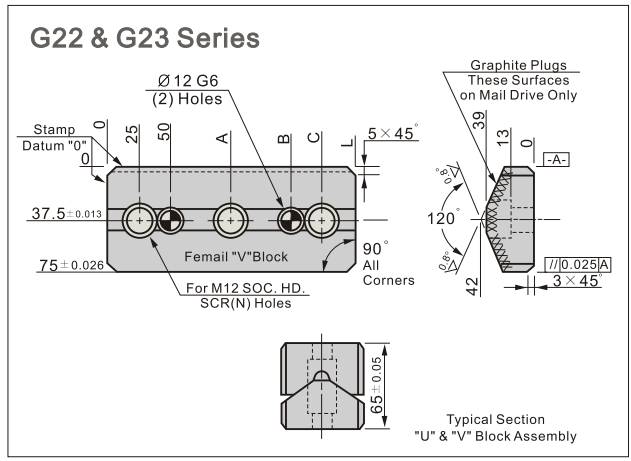

MALE "V" Blocks						
NAAMS 코드		L	A	B	C	N
X	Y					
LB G227515	LB G237515	150	-	100	125	2
LB G227520	LB G237520	200	-	150	175	
LB G227525	LB G237525	250	125	200	225	3
LB G227530	LB G237530	300	150	250	275	

125mm 'U' 블럭

125mm Wide Female 'U' Blocks

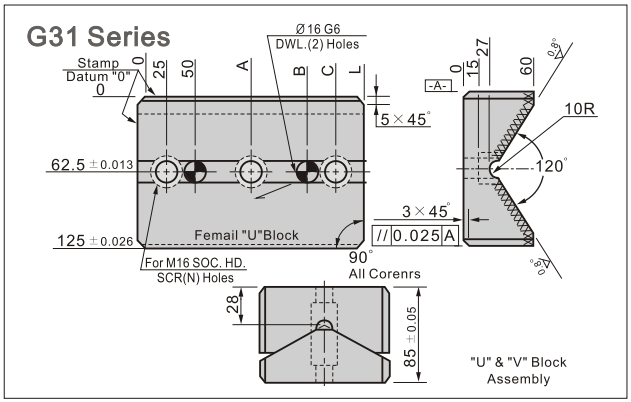

FEMALE "U" Blocks(STEEL)					
LuBo NAAMS 코드	L	A	B	C	N
LB G311215	150	-	100	125	2
LB G311220	200	-	150	175	
LB G311225	250	125	200	225	3
LB G311230	300	150	250	275	

■ **재질**

SM45C

■ **주의**

- X로 해칭한 면은 표면고주파 열처리 (HRC 50~)
- 볼트 홀 간격 공차 : ±0.12
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4

주문방법 — LuBo NAAMS 코드

예) LB G311215

주문생산

125mm 'V' 블럭

125mm Wide Male 'V' Blocks

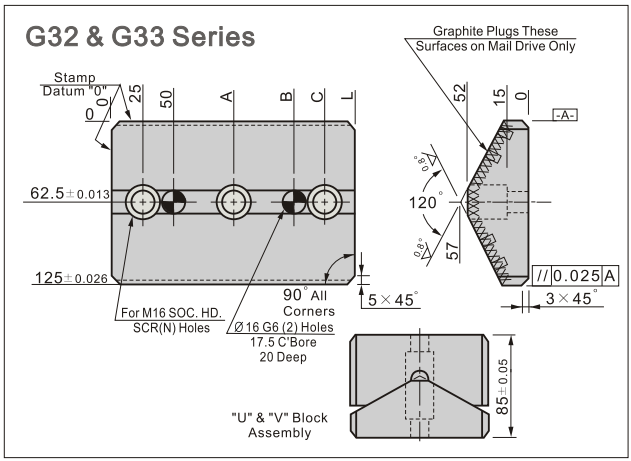



MALE "V" Blocks						
NAAMS 코드		L	A	B	C	N
X	Y					
LB G321215	LB G331215	150	-	100	125	2
LB G321220	LB G331220	200	-	150	175	
LB G321225	LB G331225	250	125	200	225	3
LB G321230	LB G331230	300	150	250	275	

■ **재질**

#500CS 또는 #500SP
(SM45C 또는 CAC304+Graphite)

■ **주의**

- Steel인 경우는 X로 해칭한 면에 고주파 열처리하고 윤활제 매입
- 볼트 홀 간격 공차 : ±0.12
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4
- 코드에서 X는 SM45C+Graphite (#500CS)
- 코드에서 Y는 동합금+Graphite (CAC304)

주문방법 — LuBo NAAMS 코드

예) LB G321215

주문생산

Center Key Guides & Center Keys

G41 & G42 & G43 Series

Center Key Guide (G41)

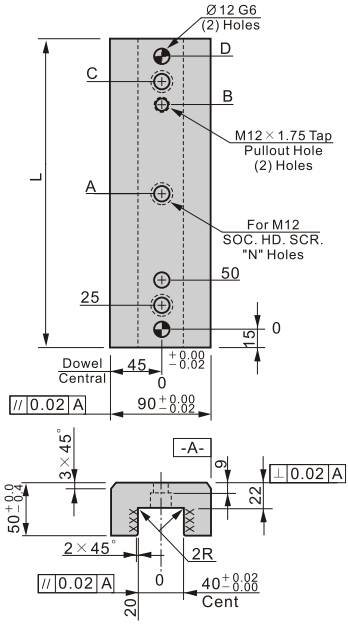

Center Key (G42 & G43)

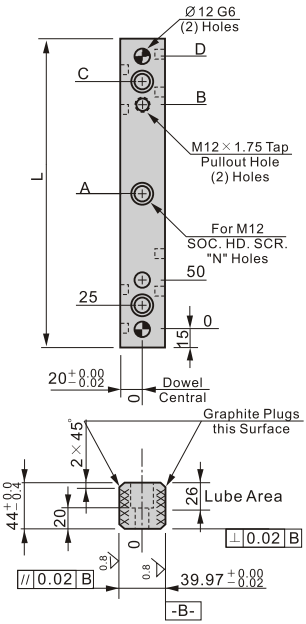

■ 재질

SM45C : 센터 키 가이드
#500SP (SM45C+Graphite) : 센터 키

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- G42 제품은 X로 해칭한 면에 열처리하고 Graphite로 매입.
- 코드에서 X는 SM45C+Graphite (#500CS)
- 코드에서 Y는 CAC304+Graphite (#500SP)

LuBo NAAMS 코드		A	B	C	D	L	N
X	Y						
LB G419020	–	-	120	145	170	200	2
LB G419030	–	135	220	245	270	300	3
LB G424020	LB G434020	-	120	145	170	200	2
LB G424030	LB G434030	135	220	245	270	300	3

주문방법 LuBo NAAMS 코드

예) LB G419020

주문생산

G51 Series

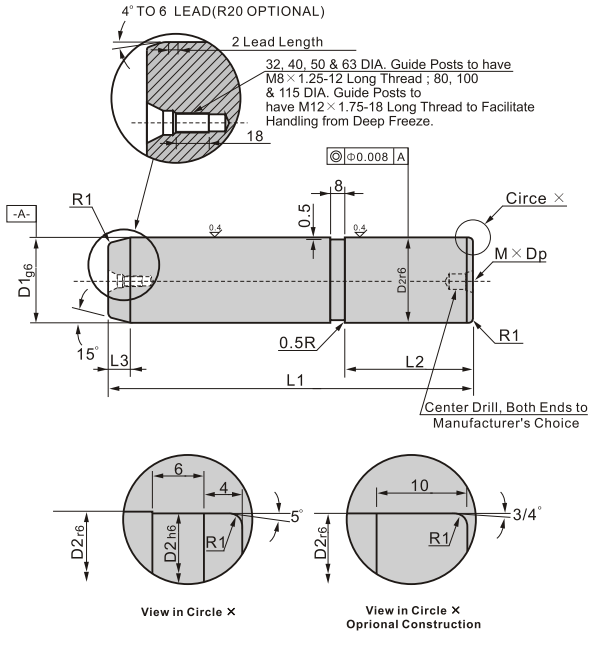

■ **재질**

SM45C (표면 고주파 열처리 HRC50~)

LuBo NAAMS 코드	D1	D2	L1	L2	L3	R1	M×Dp
LB G513214	32	32	140	45	8	2	M8×20
LB G513216			160				
LB G513218			180				
LB G513220			200				
LB G514016	40	40	160	56			M10×25
LB G514018			180				
LB G514020			200				
LB G514022			225				
LB G514025			250				
LB G515016	50	50	160	70	10	2.5	
LB G515018			180				
LB G515020			200				
LB G515022			225				
LB G515025			250				
LB G515028			280				
LB G515031			315				
LB G516320	63	63	200	80			M12×25
LB G516322			225				
LB G516325			250				
LB G516328			280				
LB G516331			315				
LB G516335			355				

LuBo NAAMS 코드	D1	D2	L1	L2	L3	R1	M×Dp
LB G516340	63	63	400	80	10	2.5	M12×25
LB G516350			500				
LB G518025	80	80	250	100		3	M16×30
LB G518028			280				
LB G518031			315				
LB G518035			355				
LB G518040			400				
LB G518050			500				
LB G511031	100	100	315	125			
LB G511035			355				
LB G511040			400				
LB G511050			500				
LB G511140	115	115	400	140			
LB G511150			500				
LB G511240	125	125	400	140			
LB G511245			450				
LB G511250			500				
LB G511255			550				
LB G511260			600				
LB G511265			650				
LB G511270			700				

주문방법

LuBo NAAMS 코드

예) LB G513214

9일

■ 최소 주문 수량 : 1개

가이드 부싱

Guide Bushings

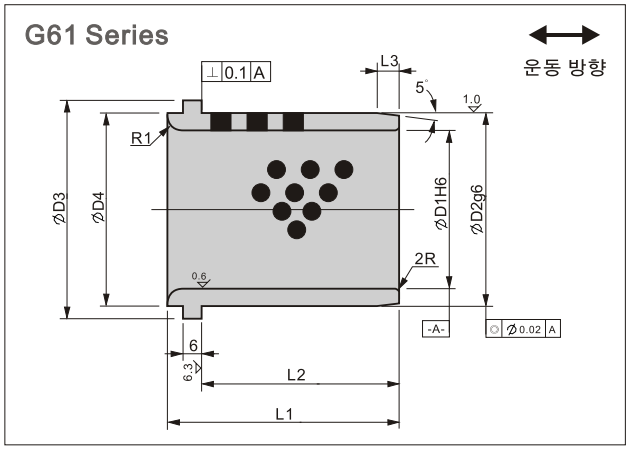

■ **재질**

#500SP (CAC304+Graphite)

■ **주의**

- 운동방향으로 윤활제가 오버랩되게 매입
- Teo 클램프 3개를 공급(별도구매품)

주문방법 — LuBo NAAMS 코드

예) LB G613250

주문생산

LuBo NAAMS 코드	D1	D2	D3	D4	L1	L2	L3	R1
LB G613250	32	40	50	40	50	40	4	3
LB G614063	40	50	63	50	63	50	5	
LB G615071	50	63	71	63	71	56	6	5
LB G616380	63	80	90	80	80	63	8	6
LB G618010	80	100	112	100	100	80	10	8
LB G611012	100	125	140	125	125	106	12	10
LB G611114	115	140	155	140	140	120		
LB G611216	125	160	180	160	160	132		12

패드 부싱

Pad Bushings

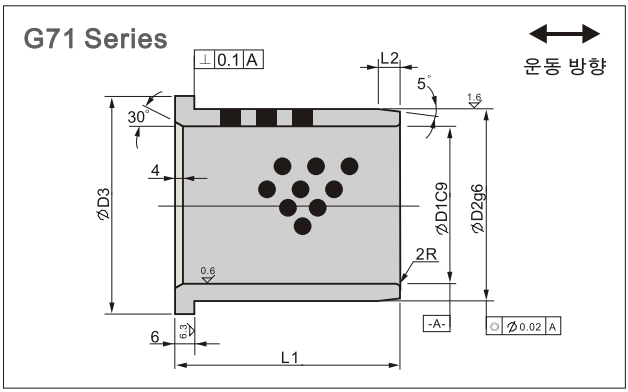

■ **재질**

#500SP (CAC304+Graphite)

■ **주의**

- 운동방향으로 윤활제가 오버랩되게 매입
- Teo 클램프 3개를 공급(별도구매품)

주문방법 — LuBo NAAMS 코드

예) LB G713250

주문생산

LuBo NAAMS 코드	D1	D2	D3	L1	L2
LB G713250	32	40	50	50	4
LB G714055	40	50	63	55	5
LB G715063	50	63	71	63	6
LB G716375	63	80	90	75	8
LB G718090	80	100	112	90	10
LB G711011	100	125	140	115	12
LB G711213	125	160	180	138	12

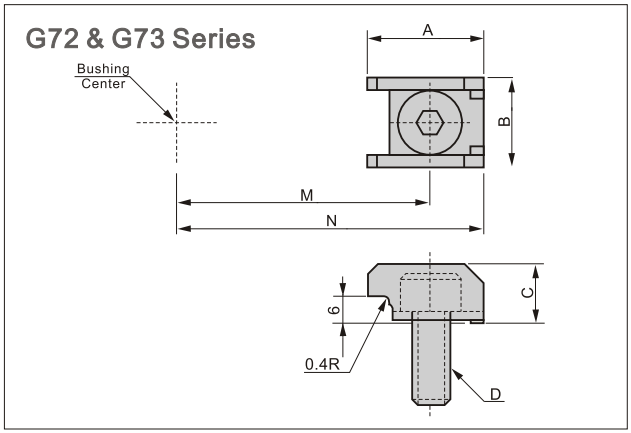

■ LuBo NAAMS 코드 G720000
A=24.6
B=18.9
C=13
D=M8×1.25×20

■ LuBo NAAMS 코드 G730000
A=27.9
B=23.5
C=15.5
D=M10×1.5×20

주문방법 LuBo NAAMS 코드
예) LB G720000
LB G730000

7일
■ 최소 주문 수량 : 3개

■ LuBo NAAMS 코드 G720000

LB G51 코드 Post Dia	M	N
32	34	45.1
40	40.5	51.6
50	44.5	55.6
63	54	65.1
80	65	76.1
100	79	90.1
115	86.5	97.6

■ LuBo NAAMS 코드 G730000

LB G51 코드 Post Dia	M	N
32	35.5	48.4
40	42	54.9
50	46	58.9
63	55.5	68.4
80	66.5	79.4
100	80.5	93.4
115	88	100.9
125	100.5	113.4

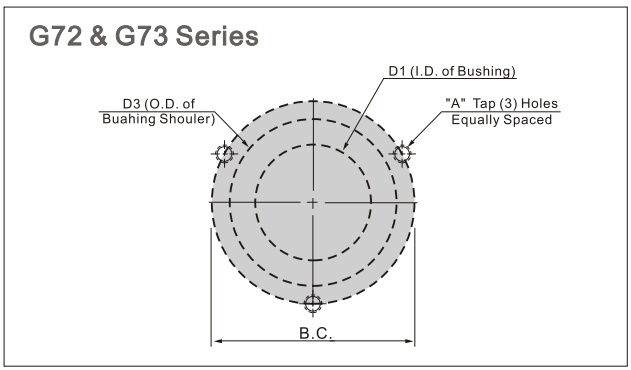

■ Use with LB G720000 "A"=M8X1.25

D1	D3	B.C. (D3+18)
32	50	68
40	63	81
50	71	89
63	90	108
80	112	130
100	140	158
115	155	173

■ Use with LB G730000 "A"=M10X1.25

D1	D3	B.C. (D3+21)
32	50	71
40	63	84
50	71	92
63	90	111
80	112	133
100	140	161
115	155	176
125	180	201

금형 리프트 핀

Die Lift Pins

■ **재질**

SCM 440

■ **표면처리**

흑색피막산화처리

주문방법 | LuBo NAAMS 코드

예) LB L013512

7일

■ 최소 주문 수량 : 1개

L01 Series

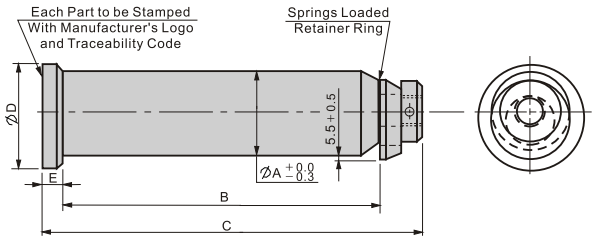

LuBo NAAMS 코드	A	B	C	D	E
LB L013512	35	125	165	45	10
LB L015019	50	190	230	63	
LB L016328	63	280	320	76	
LB L018032	80	320	370	89	15

금형 리프트 핀용 주조 라이너

Casting Liner for Die Lift Pin

■ **재질**

SCM 440

■ **표면처리**

흑색피막산화처리

주문방법 | LuBo NAAMS 코드

예) LB L115050

7일

■ 최소 주문 수량 : 1개

L11 Series

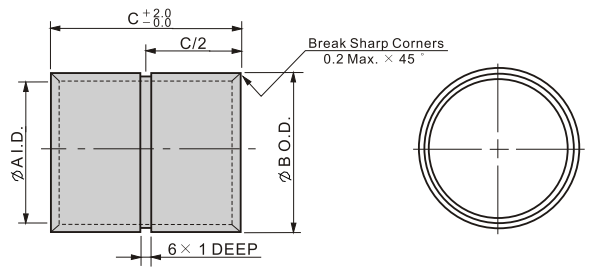

LuBo NAAMS 코드	LIFT PIN Dia.	A I.D	B O.D	C	EQUIVALENT TUBE-INCHES	
					O/S Dia	WALL THK.
LB L115050	50	52	60	50	2-3/8	.156
LB L116380	63	65	73	80	2-7/8	
LB L118010	80	83	92	100	3-5/8	.188

Eye Bolt Inserts

L31 Series

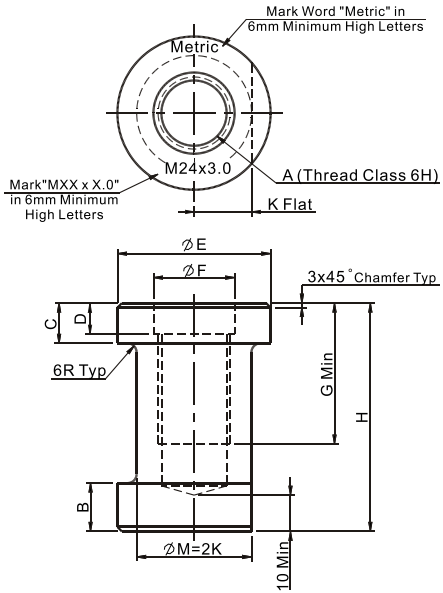

LuBo NAAMS 코드	A	B	C	D	E	F	G	H	M	K FLAT
LB L311672	M16X2.0	16	12	7	45	18	42	72	32	16
LB L312080	M20X2.5			8	50	22	50	80	36	18
LB L312288	M22X2.5			9	55	26	54	88	42	21
LB L312488	M24X3.0				55	26	54			
LB L313000	M30X3.5	20	20	10	70	33	70	100	50	25
LB L313612	M36X4.0	22	22		80	39	82	112	60	30

■ **재질**

SCM 440

주문방법 LuBo NAAMS 코드

예) LB L312080

7일

■ 최소 주문 수량 : 1개

패드용 키퍼 블럭

Keeper Blocks For Pad

R01 Series

6mm Li[M12 Serews

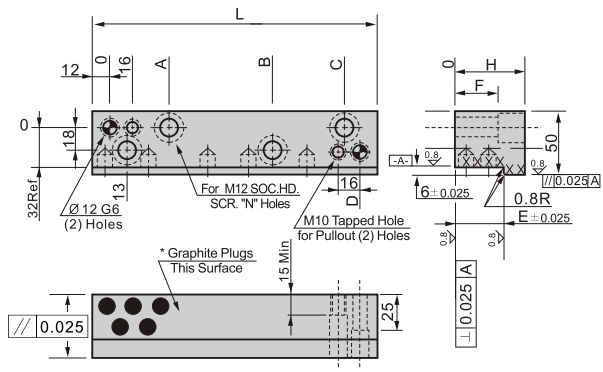

■ 재질

#500CS (SM45C+Graphite)

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4
- * 표시부분만 Graphite 매입

LuBo NAAMS 코드	HOLES (N)	L	A	B	C	D	E	F	H
LB R012507	2	75	-	-	38	51	25	15	37
LB R012510		100	-	-	63	76			
LB R012515	3	150	-	63	113	126			
LB R012520	4	200	63	113	163	176			
LB R013207	2	75	-	-	38	51	32	15	45
LB R013210		100	-	-	63	76			
LB R013215	3	150	-	63	113	126			
LB R013220	4	200	63	113	163	176			
LB R013707	2	75	-	-	38	51	37	30	50
LB R013710		100	-	-	63	76			
LB R013715	3	150	-	63	113	126			
LB R013720	4	200	63	113	163	176			
LB R014810	2	100	-	-	63	76	48	30	60
LB R014815	3	150	-	63	113	126			
LB R014820	4	200	63	113	163	176			
LB R014825		250	83	153	213	226			

주문방법

LuBo NAAMS 코드

예) LB R012507

주문생산

Keeper Blocks For Pad

R02 Series

13mm Lip M16 Screws

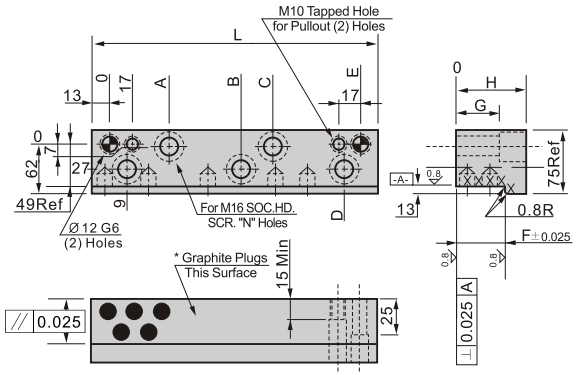

■ **재질**

#500CS (SM45C+Graphite)

■ **주의**

- X로 해칭한 면은 표면고주파 열처리 (HRC50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10
- 모서리의 모따기 : C0.4
- * 표시부분만 Graphite 매입

LuBo NAAMS 코드	HOLES (N)	L	A	B	C	D	E	F	G	H
LB R023510	2	100	-	-	-	65	74	35	25	50
LB R023512	3	125	49.5			90	99			
LB R023515		150	62			115	124			
LB R023520	4	200			112	165	174			
LB R023522	5	225		99.5	137	190	199			
LB R023525		250		112	162	215	224			
LB R023530		300		137	212	265	274			
LB R024010	2	100	-	-	-	65	74	40		60
LB R024012	3	125	49.5			90	99			
LB R024015		150	62			115	124			
LB R024020	4	200			112	165	174			
LB R024022	5	225		99.5	137	190	199			
LB R024025		250		112	162	215	224			
LB R024030		300		137	212	265	274			
LB R025010	2	100	-	-	-	65	74	50	30	70
LB R025012	3	125	49.5			90	99			
LB R025015		150	62			115	124			
LB R025020	4	200			112	165	174			
LB R025022	5	225		99.5	137	190	199			
LB R025025		250		112	162	215	224			
LB R025030		300		137	212	265	274			
LB R025510	2	100	-	-	-	65	74	55	35	80
LB R025512	3	125	49.5			90	99			
LB R025515		150	62			115	124			
LB R025520	4	200			112	165	174			
LB R025522	5	225		99.5	137	190	199			
LB R025525		250		112	162	215	224			
LB R025530		300		137	212	265	274			
LB R026510	2	100	-	-	-	65	74	65	45	90
LB R026512	3	125	49.5			90	99			
LB R026515		150	62			115	124			
LB R026520	4	200			112	165	174			
LB R026522	5	225		99.5	137	190	199			
LB R026525		250		112	162	215	224			
LB R026530		300		137	212	265	274			
LB R027510	2	100	-	-	-	65	74	75	45	100
LB R027512	3	125	49.5			90	99			
LB R027515		150	62			115	124			
LB R027520	4	200			112	165	174			
LB R027522	5	225		99.5	137	190	199			
LB R027525		250		112	162	215	224			
LB R027530		300		137	212	265	274			

주문방법 LuBo NAAMS 코드

예) LB R023510

주문생산

Cam Gibs

■ 재질

#500CS (SM45C+Graphite)

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.01

R11 Series

13mm Lip M12 Screws

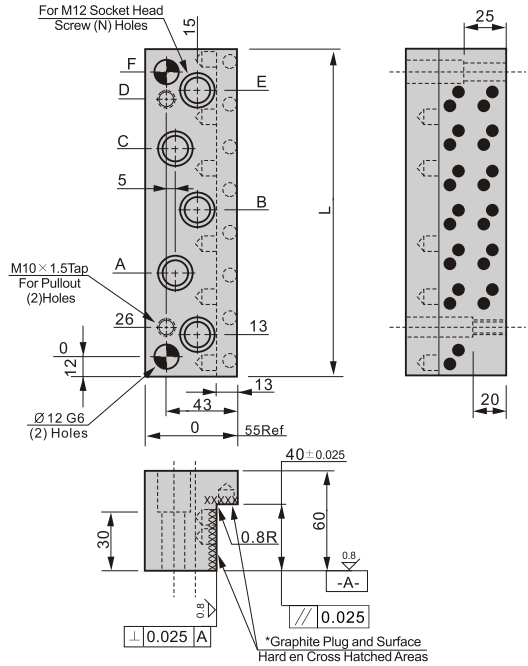

LuBo NAAMS 코드	A	B	C	D	E	F	L	HOLES (N)
LB R114016	68	-	-	110	123	136	160	3
LB R114020	88	-	-	150	163	176	200	
LB R114025	78	-	148	200	213	226	250	4
LB R114031		145.5	213	265	278	291	315	5

주문방법 LuBo NAAMS 코드

예) LB R114016

주문생산

R12 Series

10mm Lip M16 Screws

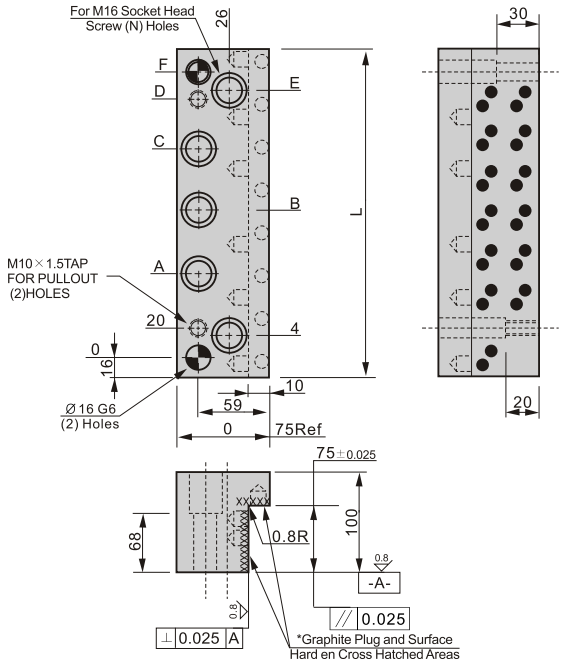

■ 재질

#500CS (SM45C+Graphite)

■ 주의

- X로 해칭한 면은 표면고주파 열처리 (HRC50~)
- 볼트 홀 간격 공차 : ±0.25
- 자리 맞춤핀 홀 간격 공차 : ±0.10

LuBo NAAMS 코드	A	B	C	D	E	F	L	HOLES (N)
LB R127516	-	64	-	108	124	128	160	3
LB R127520	-	84	-	148	164	168	200	
LB R127525	74	-	144	198	214	218	250	4
LB R127531		142	210	263	279	283	315	5

주문방법 LuBo NAAMS 코드

예) LB R127516

주문생산

Gib Plates

R21 & R22 Series

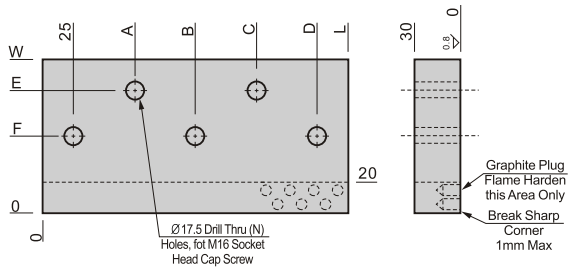

■ 재질

#500CS (SM45C+Graphite)

■ 주의

- 운동면에 표면 고주파 열처리 하고 Graphite 매입
- 볼트 홀 간격 공차 : ±0.25
- 캠 리턴 실린더에 Gib 플레이트를 장착할 경우는 볼트 홀 가공은 하지 않음

LuBo NAAMS 코드 Drilled	LuBo NAAMS 코드 Undrilled	W	L	HOLES (N)	A	B	C	D	E	F
LB R211020	LB R221020	100	200	3	100	-	-	175	80	55
LB R211025	LB R221025		250	4	90	-	160	225		
LB R211031	LB R221031		315	5	90	158	225	290		
LB R211035	LB R221035		350		100	175	250	325		
LB R211040	LB R221040		400		115	200	285	375		
LB R211045	LB R221045		450		125	225	325	425		
LB R211220	LB R221220	125	200	3	100	-	-	175	105	65
LB R211225	LB R221225		250	4	90	-	160	225		
LB R211231	LB R221231		315	5	90	158	225	290		
LB R211235	LB R221235		350		100	175	250	325		
LB R211240	LB R221240		400		115	200	285	375		
LB R211245	LB R221245		450		125	225	325	425		
LB R211520	LB R221520	150	200	3	100	-	-	175	130	
LB R211525	LB R221525		250	4	90	-	160	225		
LB R211531	LB R221531		315	5	90	158	225	290		
LB R211535	LB R221535		350		100	175	250	325		
LB R211540	LB R221540		400		115	200	285	375		
LB R211545	LB R221545		450		125	225	325	425		

주문방법

LuBo NAAMS 코드

예) LB R211050, LB R221020

주문생산

W01, W02 & W03 Series

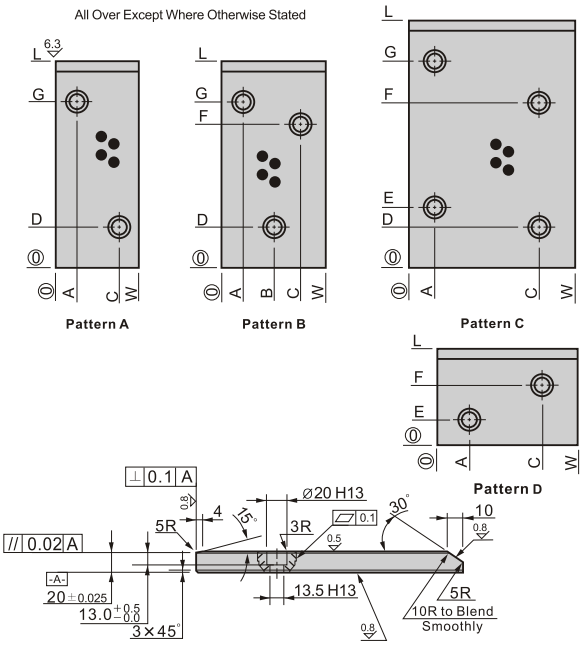

■ 재질

- G : SM45C (운동면에 표면 고주파 열처리)+Graphite
- X : SM45C (운동면에 표면 고주파 열처리)
- Y : CAC304+Graphite

■ 주의

- 운동면에 표면 고주파 열처리 하고 Graphite 매입
- 볼트 홀 간격 공차 : ±0.25
- 캠 리턴 실린더에 Gib 플레이트를 장착할 경우는 볼트 홀 가공은 하지 않음

LuBo NAAMS 코드			WIDTH	LENGTH	A	B	C	D	E	F	G	SCREW HOLES	
G	X	Y										NO	PATTERN
LB W015010	LB W025010	LB W035010	50	100	25	-	25	30	-	-	60	2	A
LB W015015	LB W025015	LB W035015		150		-			-	-	110		
LB W015020	LB W025020	LB W035020		200		-		40	-	-	160		
LB W018010	LB W028010	LB W038010	80	100	20	-	60	30	-	-	60		
LB W018015	LB W028015	LB W038015		150		-			-	-	110		
LB W018020	LB W028020	LB W038020		200		-		40	-	-	160		
LB W018025	LB W028025	LB W038025		250		-			-	-	210		
LB W018031	LB W028031	LB W038031		315		40			-	250	275	3	B
LB W011050	LB W021050	LB W031050	100	50	22	-	78	-	14	27	-	2	D
LB W011080	LB W021080	LB W031080		80		-		-	30	50	-		
LB W011010	LB W021010	LB W031010		100		-		30	-	-	60		A
LB W011015	LB W021015	LB W031015		150		-			-	-	110		
LB W011020	LB W021020	LB W031020		200		50		40	-	135	160	3	B
LB W011025	LB W021025	LB W031025		250					-	185	210		
LB W011031	LB W021031	LB W031031		315					-	250	275		
LB W011280	LB W021280	LB W031280	125	80	25	-	100	-	30	50	-	2	D
LB W011210	LB W021210	LB W031210		100		-		30	-	-	60		A
LB W011215	LB W021215	LB W031215		150		-			-	-	110		
LB W011220	LB W021220	LB W031220		200		62		40	-	135	160	3	B
LB W011225	LB W021225	LB W031225		250					-	185	210		
LB W011231	LB W021231	LB W031231		315		-			65	250	275	4	C
LB W011610	LB W021610	LB W031610	160	100	30	-	130	30	-	-	60	2	A
LB W011615	LB W021615	LB W031615		150		-			-	-	110		
LB W011620	LB W021620	LB W031620		200		80		40	-	135	160	3	B
LB W011625	LB W021625	LB W031625		250		-			65	185	210	4	C
LB W011631	LB W021631	LB W031631		315		-				250	275		

주문방법

LuBo NAAMS 코드

예) LB W015010

주문생산

Cam Dwell Wear Plates

W11, W21 & W31 Series

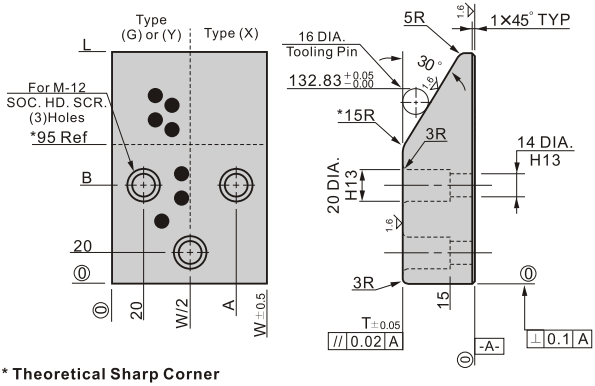

* Theoretical Sharp Corner

LuBo NAAMS 코드			T	W	L	A	B
G	X	Y					
LB W111210	LB W211210	LB W311210	30	100	125	80	70
LB W111212	LB W211212	LB W311212		125		105	
LB W111216	LB W211216	LB W311216		160		140	
LB W111510	LB W211510	LB W311510	45	100	150	80	65
LB W111512	LB W211512	LB W311512		125		105	
LB W111516	LB W211516	LB W311516		160		140	
LB W111710	LB W211710	LB W311710	60	100	170	80	
LB W111712	LB W211712	LB W311712		125		105	
LB W111716	LB W211716	LB W311716		160		140	

■ 재질

- G : SM45C (운동면에 표면 고주파 열처리)+Graphite
- X : SM45C (운동면에 표면 고주파 열처리)
- Y : CAC304+Graphite

■ 주의

- 볼트 홀 간격 공차 : ±0.25
- * 표시 없는 전 부위의 공차 : ±0.25
- 15R의 곡면부에서 약 5mm 떨어져 윤활제 매입

주문방법 LuBo NAAMS 코드

예) LB W111210

주문생산

W51, W53 & W55 Series

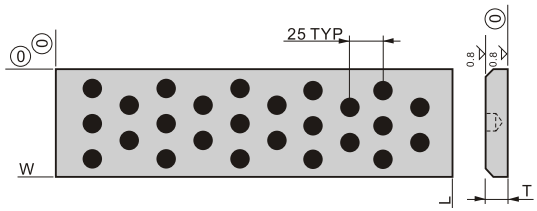

Suggestions for Fastening

Normal procedure is to use plug location for screw hole location

■ **For 10 Thicknesses**

Suggest : M6 flathead or socket head screw maximum



■ **For 12,15,20 Thicknesses**

Suggest : M10 flathead or socket head screw maximum



■ **재질**

#500SP(CAC304+Graphite)

LuBo NAAMS 코드 Y	W	T	L	LuBo NAAMS 코드 Y	W	T	L	LuBo NAAMS 코드 Y	W	T	L
LB W511025	25	10	150	LB W531025	25	10	300	LB W551025	25	10	600
LB W511040	40			LB W531040	40			LB W551040	40		
LB W511050	50			LB W531050	50			LB W551050	50		
LB W511063	63			LB W531063	63			LB W551063	63		
LB W511075	75			LB W531075	75			LB W551075	75		
LB W511010	100			LB W531010	100			LB W551010	100		
LB W511012	125			LB W531012	125			LB W551012	125		
LB W511015	150			LB W531015	150			LB W551015	150		
LB W511225	25	12		LB W531225	25	12		LB W551225	25	12	
LB W511240	40			LB W531240	40			LB W551240	40		
LB W511250	50			LB W531250	50			LB W551250	50		
LB W511263	63			LB W531263	63			LB W551263	63		
LB W511275	75			LB W531275	75			LB W551275	75		
LB W511210	100			LB W531210	100			LB W551210	100		
LB W511212	125			LB W531212	125			LB W551212	125		
LB W511215	150			LB W531215	150			LB W551215	150		
LB W511525	25	15		LB W531525	25	15		LB W551525	25	15	
LB W511540	40			LB W531540	40			LB W551540	40		
LB W511550	50			LB W531550	50			LB W551550	50		
LB W511563	63			LB W531563	63			LB W551563	63		
LB W511575	75			LB W531575	75			LB W551575	75		
LB W511510	100			LB W531510	100			LB W551510	100		
LB W511512	125			LB W531512	125			LB W551512	125		
LB W511515	150			LB W531515	150			LB W551515	150		
LB W512025	25	20		LB W532025	25	20		LB W552025	25	20	
LB W512040	40			LB W532040	40			LB W552040	40		
LB W512050	50			LB W532050	50			LB W552050	50		
LB W512063	63			LB W532063	63			LB W552063	63		
LB W512075	75			LB W532075	75			LB W552075	75		
LB W512010	100			LB W532010	100			LB W552010	100		
LB W512012	125			LB W532012	125			LB W552012	125		
LB W512015	150			LB W532015	150			LB W552015	150		

주문방법

LuBo NAAMS 코드

예) LB W511025

주문생산

Wear Strips

■ 재질

#500SP(CAC304+Graphite)

W57, W59 Series

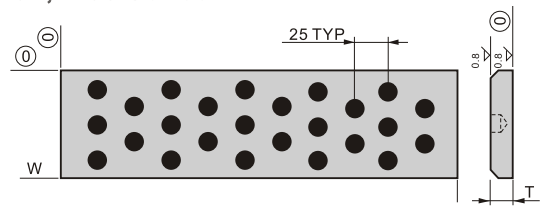

Suggestions for Fastening

Normal procedure is to use plug location for screw hole location

■ **For 10 Thicknesses**

Suggest : M6 flathead or socket head screw maximum



■ **For 12,15,20 Thicknesses**

Suggest : M10 flathead or socket head screw maximum



LuBo NAAMS 코드 Y	W	T	L	LuBo NAAMS 코드 Y	W	T	L
LB W571025	25	10	1000	LB W591025	25	10	1200
LB W571040	40			LB W591040	40		
LB W571050	50			LB W591050	50		
LB W571063	63			LB W591063	63		
LB W571075	75			LB W591075	75		
LB W571010	100			LB W591010	100		
LB W571012	125			LB W591012	125		
LB W571015	150			LB W591015	150		
LB W571225	25	12		LB W591225	25	12	
LB W571240	40			LB W591240	40		
LB W571250	50			LB W591250	50		
LB W571263	63			LB W591263	63		
LB W571275	75			LB W591275	75		
LB W571210	100			LB W591210	100		
LB W571212	125			LB W591212	125		
LB W571215	150			LB W591215	150		
LB W571525	25	15		LB W591525	25	15	
LB W571540	40			LB W591540	40		
LB W571550	50			LB W591550	50		
LB W571563	63			LB W591563	63		
LB W571575	75			LB W591575	75		
LB W571510	100			LB W591510	100		
LB W571512	125			LB W591512	125		
LB W571515	150			LB W591515	150		
LB W572025	25	20		LB W592025	25	20	
LB W572040	40			LB W592040	40		
LB W572050	50			LB W592050	50		
LB W572063	63			LB W592063	63		
LB W572075	75			LB W592075	75		
LB W572010	100			LB W592010	100		
LB W572012	125			LB W592012	125		
LB W572015	150			LB W592015	150		

주문방법 LuBo NAAMS 코드

예) LB W571025

주문생산